

Liquid soap dispenser



- Automatic liquid soap dispenser to built in countertop. Chrome-plated brass gloss finish.
- Activation by infrared ray sensor.
- Suitable for public places of high frequency of use.
- Durability and resistance against rust and corrosion.
- Suitable for liquid soap or hand sanitizer (7,5%).

TECHNICAL DATA

- Body made of chromed brass, gloss finish.
- Electronic infrared sensor that stops the dispenser when the hands are removed from the detection field.
- Power supply: transformer. Optional with batteries.
- Capacity: 1000ml. Refillable.
- Detection range of the sensor: 50 mm.
- Standard soap discharge: 0,8 cc, adjustable.
- Sensor range: 30-100 mm (± 10 mm) adjustable by remote control.
- Soap viscosity: 100-3800 cPs.
- Dimensions: 83 height x $\varnothing 22$ width x 97 depth (mm). Under counter diameter: 0-52, $\varnothing 30$ (mm).
- Operation: place your hands under the dispenser. This is activated automatically, remaining in operation while the hands are inside the sensor field. The dispenser turns off after a few seconds of removing them.
- Maintenance: for cleaning use only neutral soap and water, then wipe dry with a clean cloth. When cleaning bathroom tiles or similar, the soap dispenser should be protected from any splattering of harsh cleansers.

SUGGESTED TEST FOR PRESCRIPTION

NOFER automatic liquid soap dispenser with infrared activation system, chromed brass gloss finish. Dimensions: 83 height x $\varnothing 22$ width x 97 depth (mm). Under counter diameter: 0-52, $\varnothing 30$ (mm).



NOFER S.L.
Avenida de la fama, 118
08940 · Cornellà de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
export@nofer.com · www.nofer.com

Related
Products



01911.B



03023.B



03101.B



07250.B




03202.S



03201.S

TECHNICAL DRAWING

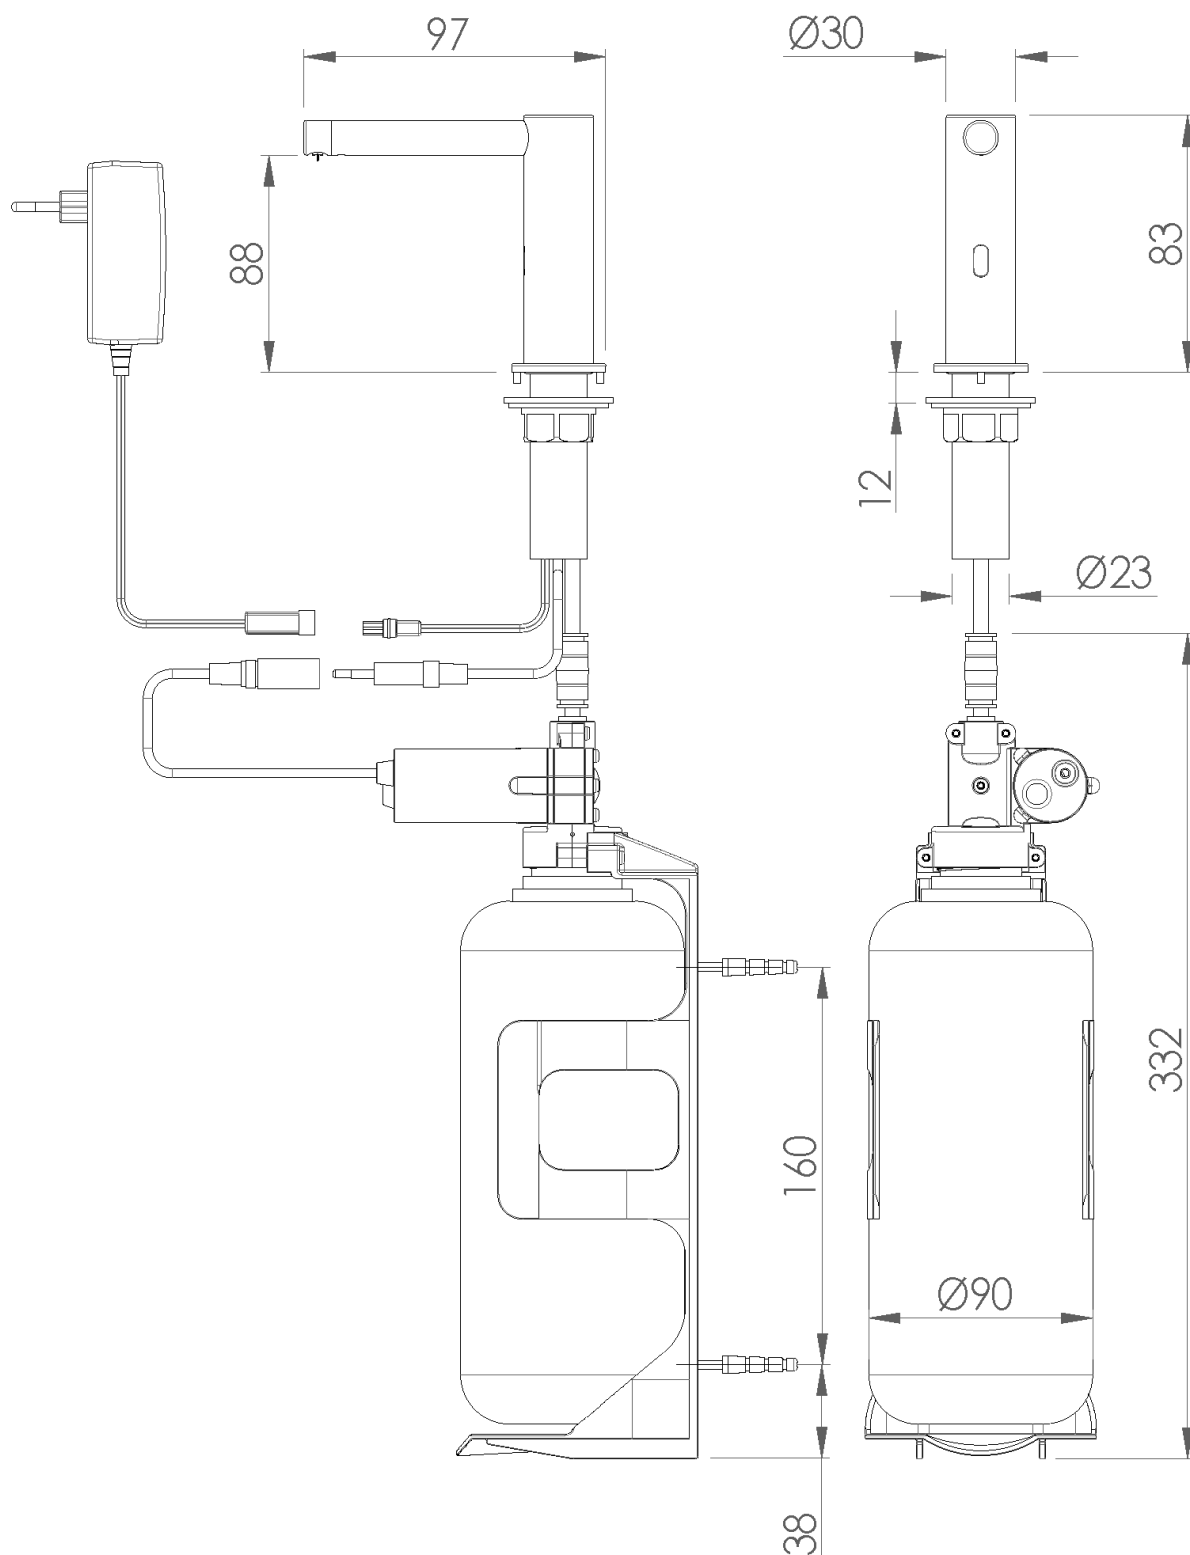

DIMENSIONS IN mm