

# Allure Connect Mirror Instructions


## Features -

Bluetooth Speakers  
LED Light Frame  
Infra Red Dimmer Switch  
De Mist Function  
Shaver Socket

## Models -



Allure-5 Connect  
700 x 500mm wide

Allure-6 Connect  
800 x 600mm wide Portrait  
600 x 800mm wide Landscape

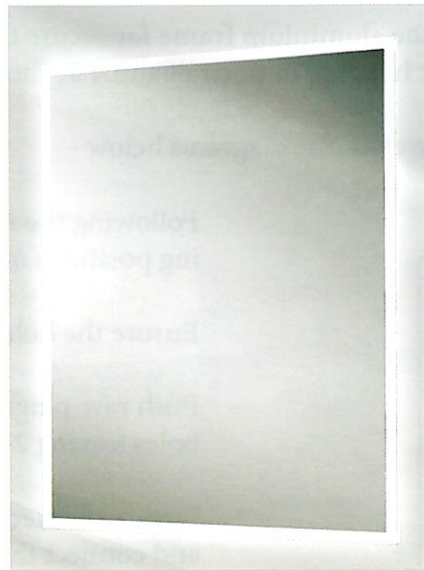

## Installation Areas

All Allure Connect Mirrors are CE approved & IP44 rated and are suitable for installation in a bathroom within "Zone 2" or the "Outside Zone". See diagram -

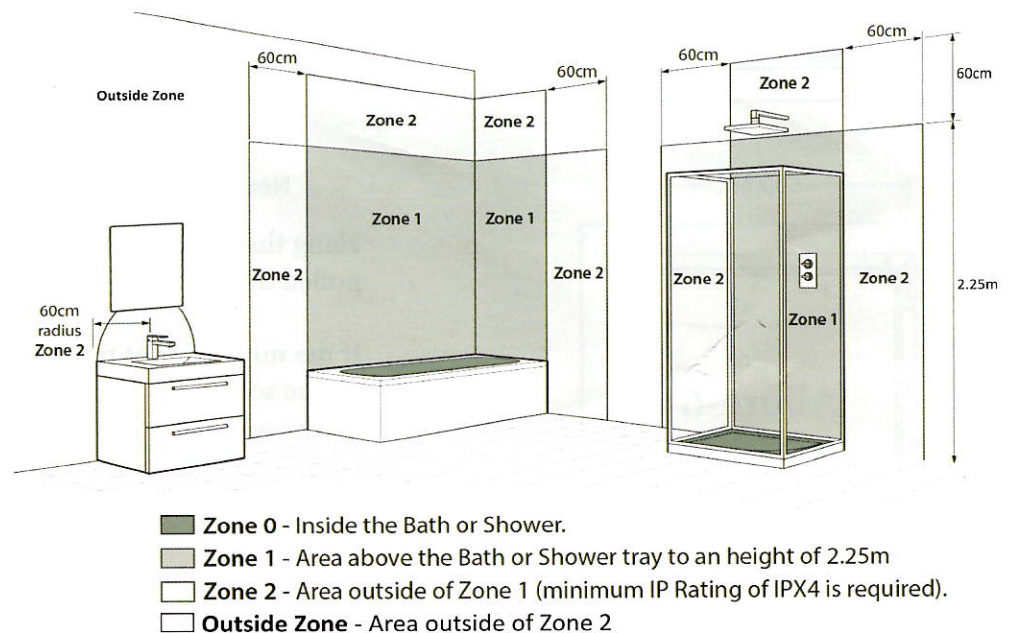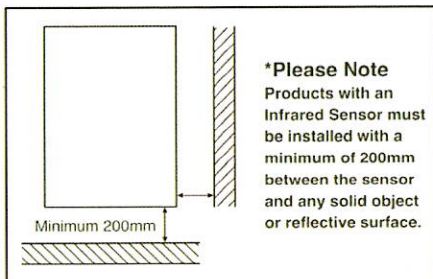

## Safety & Care

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a RCD (Residual Current Device) is advised. Beware of hidden cables or pipes when drilling. It is recommended that a piece of masking tape is applied to the wall before marking out the fixing holes to help prevent the drill slipping when drilling the fixing holes.

Allure Mirrors are manufactured in 5mm glass, do not strike glass surfaces with hard or sharp items. Do not place very hot or very cold items against the glass. Do not cover the glass when the mirror is in use.




Ensure that the wall surface is of suitable strength to hold the weight of the mirror.

# Installation

## All mirrors should be installed by a qualified electrician

The mirrors have keyholes cut in the aluminium frame for secure fixing of the mirror to the wall. The Allure-6 Connect mirror has 4 keyholes for hanging in portrait and 4 keyholes for hanging in landscape.

The measurements for these are given in the diagrams below -

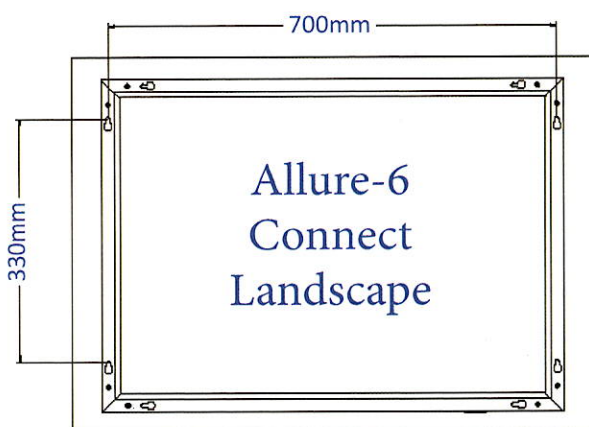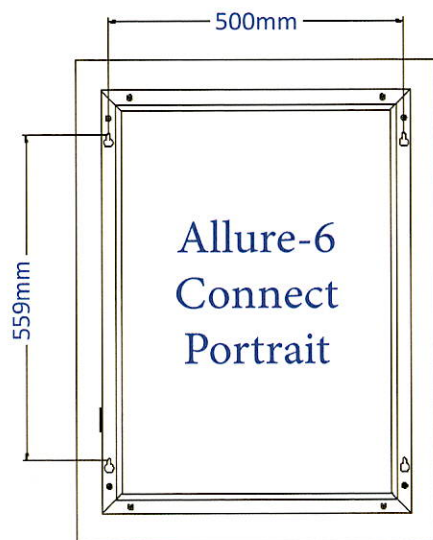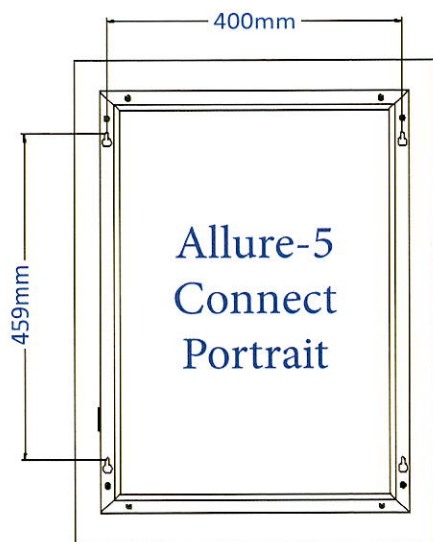


Following the relevant diagram for your mirror mark the 4 hanging positions onto your wall.

Ensure the holes are level and parallel with a spirit level

Push raw-plugs into the holes and fix screws into each of the 4 holes leaving 2-3mm of screw thread protruding from the wall.

Ensure the electricity supply to the cable in the wall is switched off and connect the wire from the back of the mirror to the power cable using a suitable terminal block.

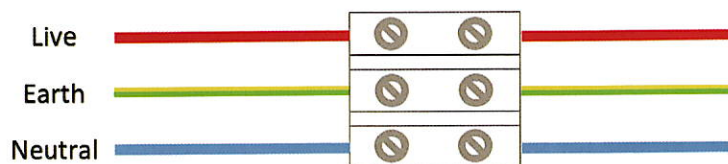

Hang the mirror on the 4 fixing points. Make sure the mirror is pulled down equally into the top of the keyholes.

If the mirror is not tight to the wall remove the mirror and tighten the screws further and re hang, repeat until the mirror is firm on the wall.

Turn on the power to the bathroom, upon turning on the power to the bathroom the sensor dimmer switch on the mirror will light up.

## Operating the Mirror & Speakers

To connect your mobile device to the speakers, open the bluetooth settings on your device and select "mirror BT". When you have finished listening to your music you need to disconnect your mobile device from the mirror so that others can connect.

To operate the mirror light and demist function **wave** your hand over 70-80mm in front of the infra red sensor.

To adjust the brightness **hold** you hand 70-80mm from the sensor and then remove hand at the desired brightness. The brightness will cycle from 10% to 100% and back to 10% until you remove your hand.

To turn the lights off **wave** your hand in front of the sensor.