Allure Connect-12 Mirror Instructions

Features -

Bluetooth Speakers LED Light Frame Infra Red Dimmer Switch **De Mist Function** Shaver Socket


Size -

Allure Connect-12 (S429)

1200 x 800mm wide Landscape

*Please Note Products with an


be installed with a minimum of 200mm between the sensor





Installation Areas

All Allure Connect Mirrors are CE approved & IP44 rated and are suitable for installation in a bathroom within "Zone 2" or the "Outside Zone". See diagram -

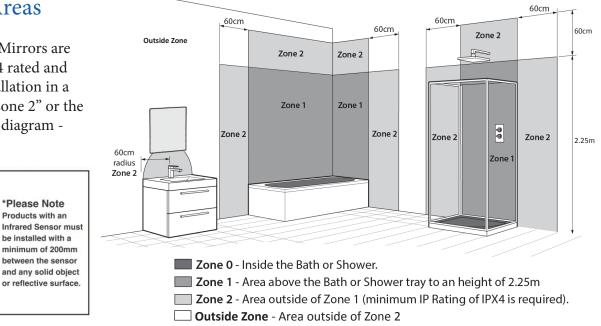

Safety & Care

Minimum 200mm

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a RCD (Residual Current Device) is advised. Beware of hidden cables or pipes when drilling. It is recommended that a piece of masking tape is applied to the wall before marking out the fixing holes to help prevent the drill slipping when drilling the fixing holes.

Allure Mirrors are manufactured in 5mm glass, do not strike glass surfaces with hard or sharp items. Do not place very hot or very cold items against the glass. Do not cover the glass when the mirror is in use.

Ensure that the wall surface is of suitable strength to hold the weight of the mirror.




Installation

All mirrors should be installed by a qualified electrician

The mirrors are hung on the wall using a z-profile with the additin of 2 keyholes cut in the aluminium frame for secure fixing mirror to the wall.

The measurements for these are given in the diagrams below -

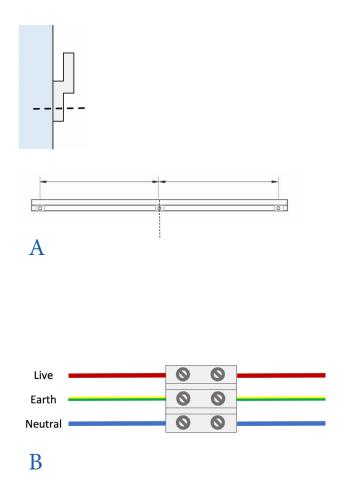

Determine the position and height at which you want to install the mirror.

Place the z-profile on the wall 93.5mm below the height you want for the top of the mirror, orientated as diagram A, and central on the wall.

Check the z-profile is level and mark the holes and drill and push in raw plugs and screw the z-profile to the wall

Mark up and drill hole positions for the botton hanging screws as shown on diagram C. Push in raw plugs and fix screws leaving 2-3mm of screw thread protruding from the wall.

Ensure the electricity supply to the cable in the wall is switched off and connect the wire from the back of the mirror to the power cable using a suitable terminal block.

Hang the mirror on the z-profile & the 2 bottom fixing points.

Operating the Mirror & Speakers

To connect your mobile device to the speakers, open the bluetooth settings on your device and select "mirror BT". When you have finished listening to your music you need to diconnect your mobile device from the mirror so that others can connect.

> To operate the mirror light and demist function **wave** your hand over 70-80mm in front of the infra red sensor.

To adjust the brightness **hold** you hand 70-80mm from the sensor and then remove hand at the desired brightness. The

brightness will cycle from 10% to 100% and back to 10% until you remove your hand.

To turn the lights off **wave** your hand in front of the sensor.

